


# F.T.M.C. TYPE FTCOD

DIN-Rail RCBO IEC601009 10kA 240V

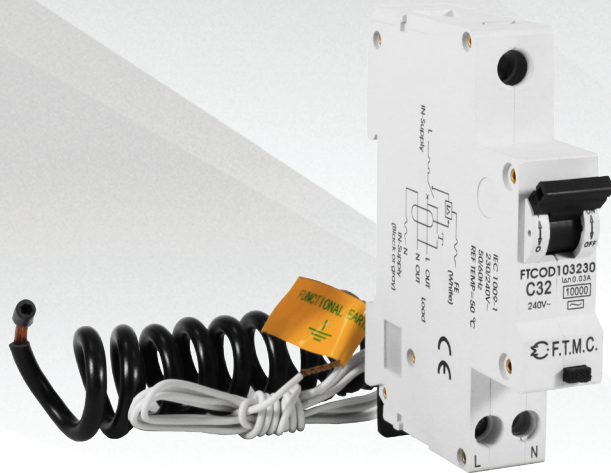

## Feature

FTCOD-RCBOs are available with a breaking capacity of 10kA to IEC601009 The RCBO are calibrated to 40 °C and can be supplied with 50°C ambient calibration. To order insert at the end of RCBO list number: FTCOD100610 ref. F100396

FTCOD Electronic Combined RCBO/MCB Devised , 10 kA 1 Pole 240V sensitivity(10,30,100,300)

| Rating | Ref.No. | 1 Pole 10mA | Ref.No. | 1 Pole 30mA | Ref.No. | 1 Pole 100mA | Ref.No. | 1 Pole 300mA |
|--------|---------|-------------|---------|-------------|---------|--------------|---------|--------------|
| 6      | F100396 | FTCOD100610 | F100403 | FTCOD100630 | F100410 | FTCOD1006100 | F100417 | FTCOD1006300 |
| 10     | F100397 | FTCOD101010 | F100404 | FTCOD101030 | F100411 | FTCOD1010100 | F100418 | FTCOD1010300 |
| 16     | F100398 | FTCOD101610 | F100405 | FTCOD101630 | F100412 | FTCOD1016100 | F100419 | FTCOD1016300 |
| 20     | F100399 | FTCOD102010 | F100406 | FTCOD102030 | F100413 | FTCOD1020100 | F100420 | FTCOD1020300 |
| 25     | F100400 | FTCOD102510 | F100407 | FTCOD102530 | F100414 | FTCOD1025100 | F100421 | FTCOD1025300 |
| 32     | F100401 | FTCOD103210 | F100408 | FTCOD103230 | F100415 | FTCOD1032100 | F100422 | FTCOD1032300 |
| 40     | F100402 | FTCOD104010 | F100409 | FTCOD104030 | F100416 | FTCOD1040100 | F100423 | FTCOD1040300 |

## Dimensions

