


Timer FTCTIMER

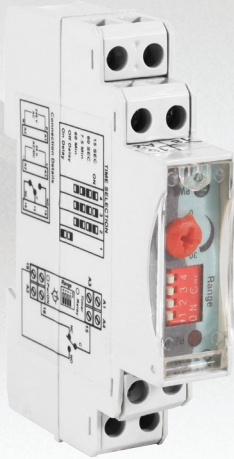

Feature

- Consistent reliability with high accuracy
- Low cost
- Time Delay user settable (4 Ranges)
- LED indication for Power & Relay status
- Compact size
- ON Delay / OFF Delay modes of operations
- Application
 - Protection:
 - Control Panel
 - Feeder / Motor
 - Generator
 - Transformer
 - Electrical Dist.

Selection Chart

Aux. Supply	230VAC 50/60 Hz & 24V AC/DC 110VAC 50/60 Hz & 24V AC/DC
Time Range	15 /60 Sec. 7.5 / 60 min.
Change Over Time	50 / 100 msec
Relay Contacts	1 Potential Free Contact(NO & NC)
Contact Rating	<100mSec. on power interruption
Temp	-20°C to +55°C
Humidity	< 95% RH (non condensing)
Accuracy	± 5% of full Scale
Repeatability	± 0.5%
Dimension	17.5 x 91 x 64 mm (WxLxH)
Mounting	Din (35 mm rail) / 2 x m4 screw
Weight	150 gms
Reset Time	<100mSec. on power interruption
Ref. No.	F101750