


F.T.M.C. TYPE Under Voltage Relay with Timer FTCUVRT

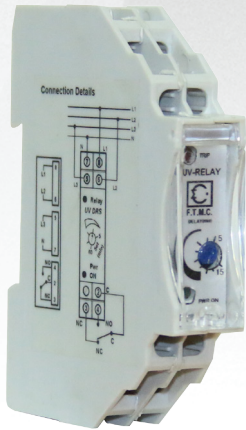

Feature

- Consistent Reliability with High Accuracy
- Time Delay User Settable
- LED Indication For Healthy / Faulty Status
- Compact Size 17.5 mm DIN
- Under voltage relay, delayed restart

Specification

System	3 Phase 4 wire/1 Phase system
Burden on Aux.	< 3 VA
Nominal Voltage	380 / 415 / 440VAC
Set Point	5 to 15min (Restart time)
Delay	-25% of Nominal Voltage (Factory set)
Relay Contacts	1 Potential Free Contact, (NO, C & NC), (De-Energise on Fault)
Contact Rating	6 Amps / 230 V AC / 28 V DC
Temp	Operating: -10° C to 55° C, Storage: -20° C to + 75° C
Humidity	< 95% RH (non condensing)
Dimension	75 x17.5 97 mm (L x B x H)
Mounting	Din (35 mm rail)
Weight	75 gms

Description	Cat.	Ref. No.
1 Phase System Under Relay Voltage With Timer	FTCUVRT1P	F103404
3 Phase System Under Relay Voltage With Timer	FTCUVRT3P	F103405