


F.T.M.C Single Phase Distribution Board DIN Rail Type



CATALOGUE NUMBER AND SELECTION GUIDE

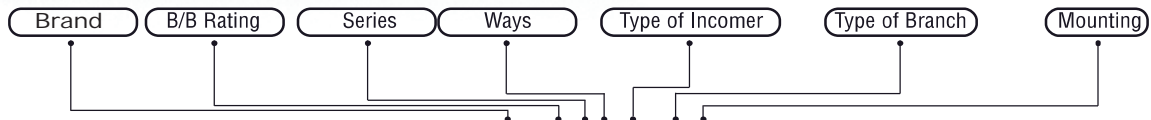

FTMC 100A 6/DIN-DIN-F

Catalogue number	Ref.No.	Outgoing ways SP	Board dimension (mm)			Flush Cover Dimension (mm)	
			Height A	Width B	Depth C	Height D	Width E
Flush Mounted							
Incomer types: DIN 100A		Outgoing: DIN Type					
FTMC100 A 6/DIN-DIN-F	101991	6	345	330	90	365	350
FTMC100 A 8/DIN-DIN-F	101992	8	380	330	90	400	350
FTMC100 A 10/DIN-DIN-F	101993	10	415	330	90	435	350
FTMC100 A 12/DIN-DIN-F	101994	12	450	330	90	470	350

Catalogue number	Ref.No.	Outgoing ways SP	Board dimension (mm)		
			Height A	Width B	Depth C
Surface Mounted	101995				
Incomer types: DIN 100A		Outgoing: DIN Type			
FTMC100 A 6/DIN-DIN-S	101996	6	345	330	90
FTMC100 A 8/DIN-DIN-S	101997	8	380	330	90
FTMC100 A 10/DIN-DIN-S	101998	10	415	330	90
FTMC100 A 12/DIN-DIN-S	101999	12	450	330	90

* Note: D and E Dimensions are used for Flush only.

Dimensions (mm)

Maximum Cable Capacity

Incomers and feeders

Neutral bar 10mm²

Earth bars 10mm²


Main earth termination 16mm² - Terminal

MCB 25mm²


RCD 63A-25mm², 80 & 100A - 50mm²

RCBO 16mm²


Switch Disconnectors 35mm²

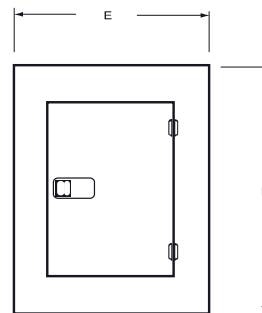

FRONT VIEW

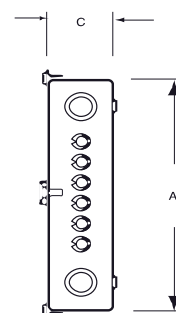

SIDE VIEW



TOP VIEW

1- The incomer can be DIN or RCD