



F.T.M.C. Single Phase Distribution Board Plug-in Type

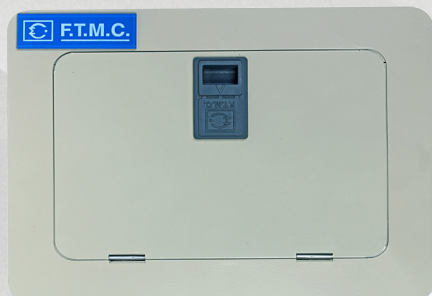

CATALOGUE NUMBER AND SELECTION GUIDE

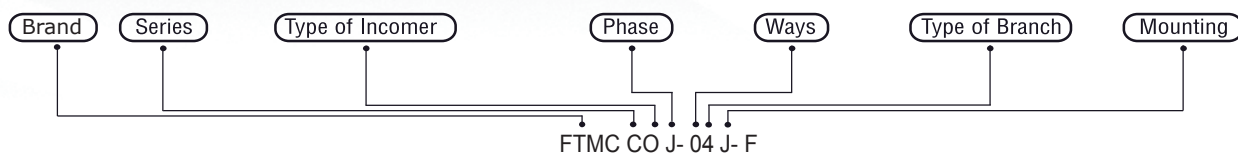

Catalogue number	Ref.No.	Outgoing ways SP	Board dimension (mm)			Flush Cover Dimension (mm)	
Flush Mounted			Height A	Width B	Depth C	Height D	Width E
Incomer types: DIN		Outgoing: Plug-In Type					
FTMC COJ104-J-F	F101980	4	260	230	90	285	255
FTMC COJ106-J-F	F101981	6	310	230	90	335	255
FTMC COJ108-J-F	F101982	8	360	230	90	385	255
FTMC COJ110-J-F	F101983	10	410	230	90	435	255
FTMC COJ112-J-F	F101984	12	465	230	90	490	255
FTMC COJ114-J-F	F103357	14	515	230	90	540	255

Catalogue number	Ref.No.	Outgoing ways SP	Board dimension (mm)		
Surface Mounted			Height A	Width B	Depth C
Incomer types: DIN		Outgoing: Plug-In Type			
FTMC COJ104-J-S	F101986	4	260	230	90
FTMC COJ106-J-S	F101987	6	310	230	90
FTMC COJ108-J-S	F101988	8	360	230	90
FTMC COJ110-J-S	F101989	10	410	230	90
FTMC COJ112-J-S	F101990	12	465	230	90
FTMC COJ114-J-S	F103358	14	515	230	90

* Note: D and E Dimensions are used for Flush only.

Dimensions (mm)

Maximum Cable Capacity

Incomers and feeders

Neutral bar 10mm²

Earth bars 10mm²

Main earth termination 16mm² - Terminal

MCB 25mm²

RCD 63A-25mm², 80 & 100A - 50mm²

RCBO 16mm²

Switch Disconnectors 35mm²

1- The incomer can be DIN, RCD or Plug-in

